



PS-1340



1-800-773-0062
www.marianinc.com

Product Description:


PS-1340 is a differential coated polyester film. The coated two side tape utilizes an acrylic adhesive on one side of the polyester carrier and a silicone pressure sensitive adhesive on the reverse side of the film carrier.

Construction / Properties:

Property	Value	Test Method
Total Thickness	0.10 mm	QSP-726
Acrylic Adhesive Thickness	0.03 mm	QSP-726
Polyester Carrier Thickness	0.03 mm	QSP-726
Silicone Adhesive Thickness	0.06 mm	QSP-726
Acrylic PSA Liner	0.06 mm white polyester	Visual
Silicone PSA Liner	0.06 mm clear polyester	Visual
Adhesive Peel Strength	Acrylic PSA 1300 g/in Silicone PSA 1100 g/in	QSP-722
Tensile Strength, Yield	7000 g/in	ASTM D882
Continuous Use Conditions	<120 C	WI-8.2-13

Features

- Excellent Tack
- Good Resistance to Heat and Humidity
- Excellent Adhesion to Low Surface Energy Substrates

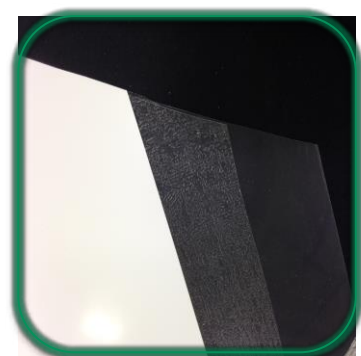

Specific tests should be performed by the end user to determine the product suitability for the particular application.

For Additional Information:
E-Mail: sales@polymerscience.com
Toll Free: +1 888.533.7004
Web: www.polymerscience.com

Revision: 050115